


KWIK-STEP Modular Stairway System

Summary of Components

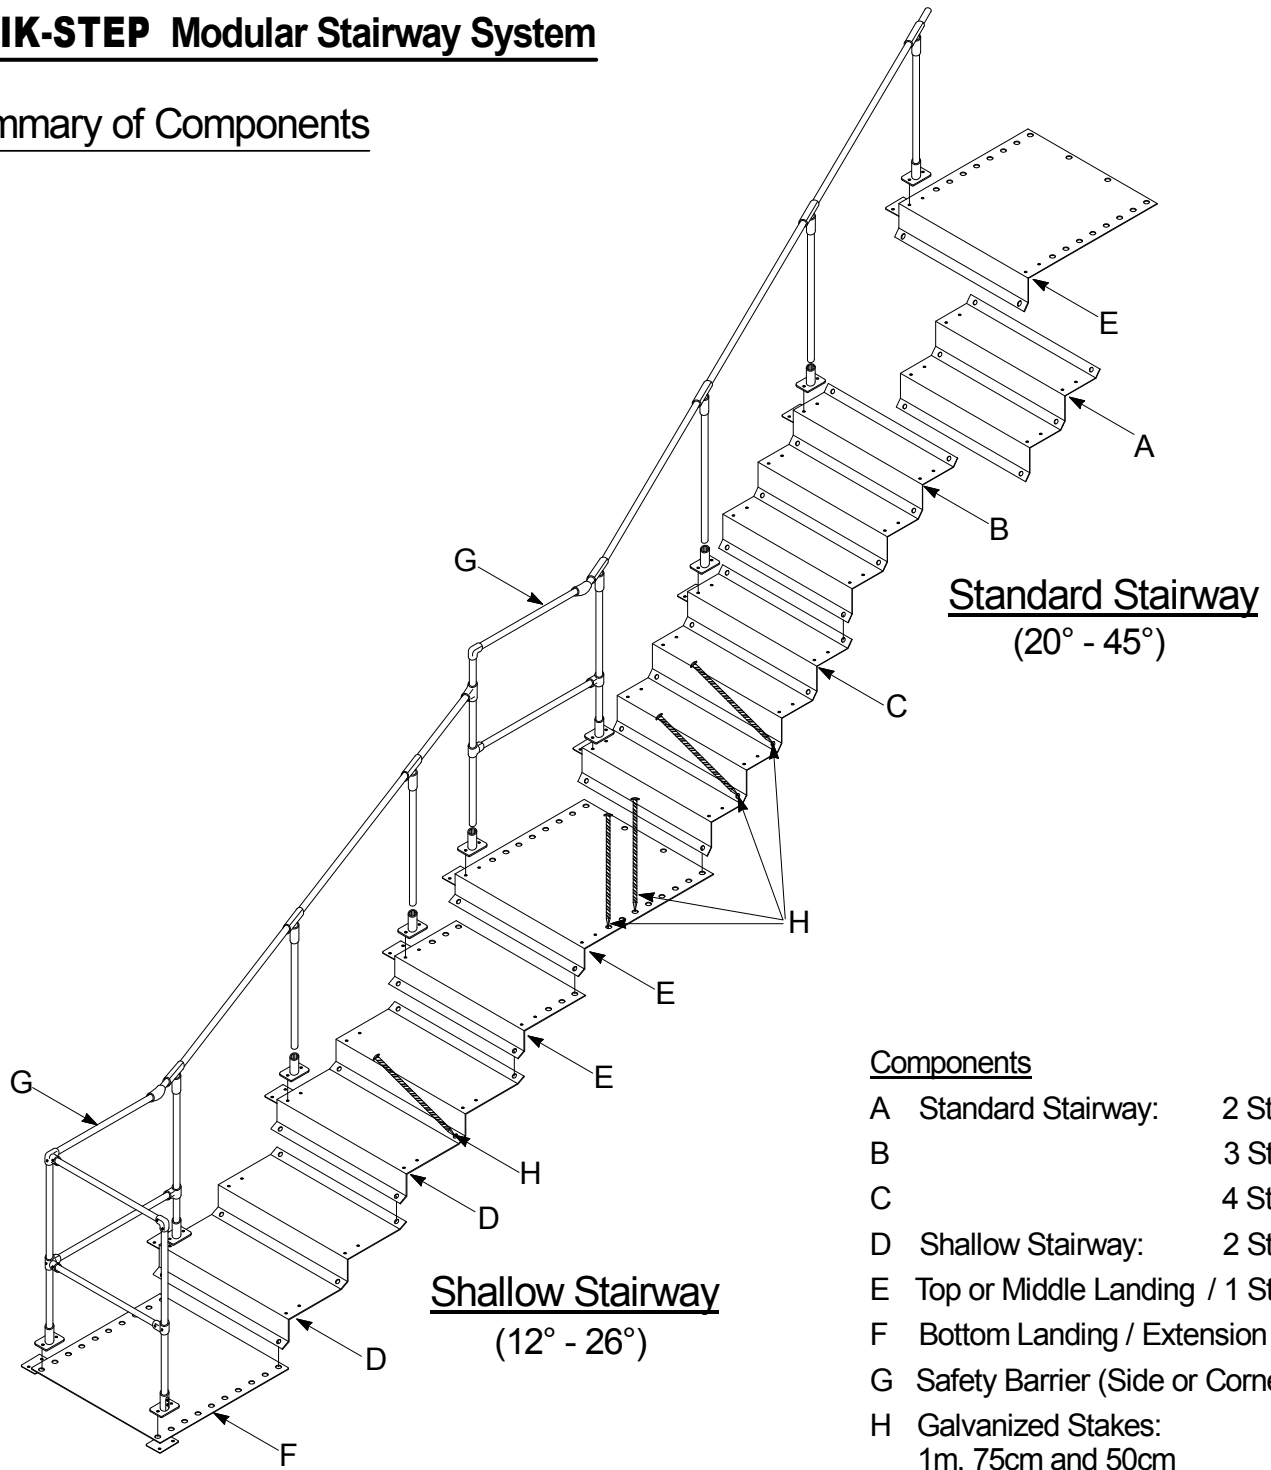

Components

A	Standard Stairway:	2 Steps
B	Standard Stairway:	3 Steps
C	Standard Stairway:	4 Steps
D	Shallow Stairway:	2 Steps
E	Top or Middle Landing / 1 Step	
F	Bottom Landing / Extension	
G	Safety Barrier (Side or Corner)	
H	Galvanized Stakes:	1m, 75cm and 50cm

Notes

- 1 A landing module is required at the top of each flight (as the landing incorporates the top riser)
- 2 Shallow Stairway / Standard Stairway and Landing modules are available for the following gradients:
Shallow: 12°, 14°, 16°, 18°, 20°, 22°, 24°, 26°
Standard: 20°, 22°, 24°, 25°, 26°, 28°, 30°, 32°, 35°, 38°, 40°, 45°
- 3 The slope length per step for:
Shallow Stairway = 50cm (16 step flight = 8.00m)
Standard Stairway = 36cm (16 step flight = 5.76m)
- 4 Landings have a standard length of 1 metre. Alternative lengths are available for complex sites and longer lengths can be formed with extension plates. Short landings are also used as single steps for Shallow Stairway
- 5 A dog-leg landing is formed by installing 2 landing modules side-by-side, with an additional safety barrier on the exposed edge
- 6 Stakes have been omitted for clarity. They are inserted through the overlaps and along the sides of the modules. Permanent stairways are normally installed with 1m ribbed stakes in:
 - every hole on the flights
 - alternate holes along the sides of the landings
- 7 The summary shows only the main components a wide range of accessories are available for complex sites